


SIX TIER LOCKER: STANDARD DUTY



6t

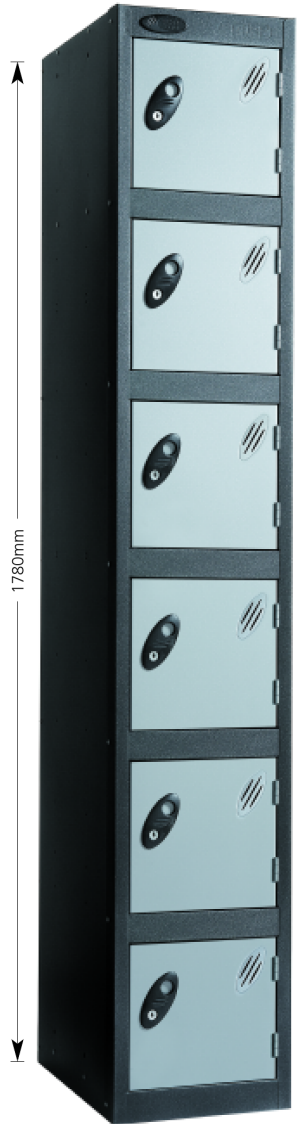

NOMINAL CLEAR ENTRY
245mm
see table, right, for widths

PICTURED
Door style: Plain vented
Lock type: Probe standard cam lock
Colour: Silver door / Black body

DOOR STYLE OPTIONS

| | | | |
|--------------------------------------|-----|-----|-----|
| DOOR WIDTHS | 241 | 316 | 396 |
| PLAIN VENTED | ✓ | ✓ | ✓ |
| PERFORATED | ✓ | ✓ | ✓ |
| TRESPA SOLID LAMINATE LAMINATE FACED | ✓ | ✓ | ✓ |
| CLEAR* | ✓ | | |

*Cam Lock and Hasp and Staple locks only

MATERIAL

| | |
|-------------|--------|
| SIDES | 0.7 mm |
| BACKS | 0.7 mm |
| TOPS | 0.7 mm |
| BASE | 0.7 mm |
| FRONT FRAME | 0.9 mm |
| DOORS | 0.9 mm |

MAIN PROBE LOCKER FEATURES

| | |
|-------------------------------------|---|
| WELDED FRONT FRAME | ✓ |
| WELDED PLINTHS BETWEEN COMPARTMENTS | ✓ |
| THROUGH FRAME LOCKING SYSTEM | ✓ |
| THREE KNUCKLE HINGES | ✓ |

LOCKING OPTIONS

| | |
|-----------------------------------|---|
| CAM LOCK | ✓ |
| HASP AND STAPLE LOCK | ✓ |
| RADIAL PIN LOCK | ✓ |
| COMBINATION LOCK | ✓ |
| COIN / TOKEN RETAIN | ✓ |
| COIN / TOKEN RETURN | ✓ |
| THREE POINT LOCKING | ✓ |
| ELECTRONIC LOCK* | ✓ |
| RE-PROGRAMMABLE COMBINATION LOCK* | ✓ |

*Not available on locker size 1780 x 380 x 380

LOCKER WEIGHTS - single and nested


| H | W | D | SINGLE WT KG | NEST 2 WT KG | NEST 3 WT KG |
|------|-----|-----|--------------|--------------|--------------|
| 1780 | 305 | 305 | 24 | 45 | 66 |
| 1780 | 305 | 380 | 27 | 50 | 73 |
| 1780 | 305 | 460 | 30 | 55 | 80 |
| 1780 | 380 | 380 | 31 | 58 | 85 |

AVAILABLE COLOURS

| | DOORS | BODY |
|-------------|-------|------|
| RED | ✓ | |
| BLUE | ✓ | |
| YELLOW | ✓ | |
| GREEN | ✓ | |
| SMOKE WHITE | ✓ | ✓ |
| SILVER | ✓ | ✓ |
| BLACK | | ✓ |

NOMINAL CLEAR ENTRY WIDTHS

Clear entry width = locker width minus 64mm.

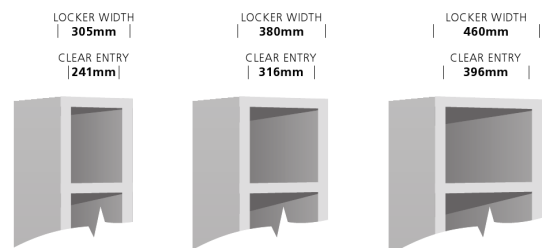

QUALITY ASSURANCE



Probe Lockers are designed and manufactured in the UK, conforming to **BS 4680:1996** 'Standard Duty' (excluding size specification), **ISO 9001:2000** and **Environmental Management System ISO 14001:2004**